

Example of order: MAV 1008 100 x 145


Features

- High capacity
- Self-centering, self-locking
- Two thrust rings with single taper design
- Tolerances: shaft h7-h11; hub bore H7-H11
- Surface finish of shaft and hub bore $Ra < 3.2 \mu m$

Composition

- Slotted front thrust ring, with integrated push-off holes
- Slotted rear thrust ring
- Slotted outer ring, with integrated push-off threads
- Set of socket head cap screws, grade 12.9

Application examples

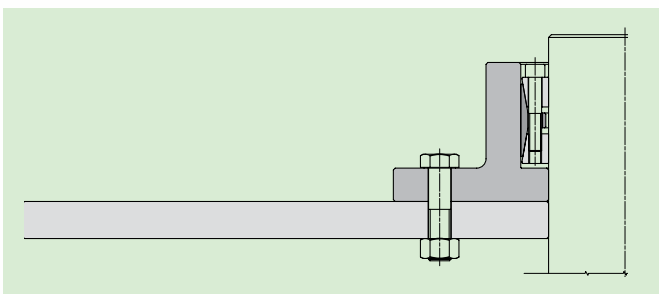

Brake disc connected with MAV 1008 and flange

Components

